

Leaded Radial Aluminum Electrolytic Capacitor – JRB

FEATURES

- Wide temperature range, long life: 105°C 2000 hours.
- Miniature and low impedance




SPECIFICATIONS

Operating Temperature Range (°C)	-40°C ~ +105°C	-25°C ~ +105°C								
Rated Voltage Range (V)	6.3V ~ 100V	160V ~ 450V								
Capacitance Tolerance (20°C, 120Hz)	±20%									
Leakage Current (µA)	0.01CV or 3 whichever is greater. (at 25°C, after 2 minutes)	$I \leq 0.02C_R U + 15 (\mu A)$ (2minutes)								
C: Nominal Capacitance (µF) V: Rated Voltage (V)										
Dissipation Factor (20°C, 120Hz)	For Capacitance of more than 1000µF, add 0.02 for every increase of 1000µF									
	U _R (V)	6.3	10	16	25	35	50	63	100	160~450
	Tanδ(Max.)	0.25	0.2	0.17	0.15	0.12	0.10	0.09	0.08	0.2
Temperature Stability (120Hz)	U _R (V)	6.3	10	16~50	63~100	160~250	400		450	
	Z-25°C/Z+20°C	--	--	--	--	≤6	≤4		≤4	
	Z-40°C/Z+20°C	≤8	≤6	≤4	≤3	--	--		--	
Load Life (+105°C)	Time	2000hours ($\emptyset D \leq 8$, 1000 hours)								
	Leakage Current	Not more than the specified value.								
	Capacitance Change	Within ±20% of the initial value								
	Dissipation Factor	Not more than 200% of the specified value.								

Shelf Life (+105°C) 1000 hours. No voltage applied. After test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement.

DIMENSIONS (mm)

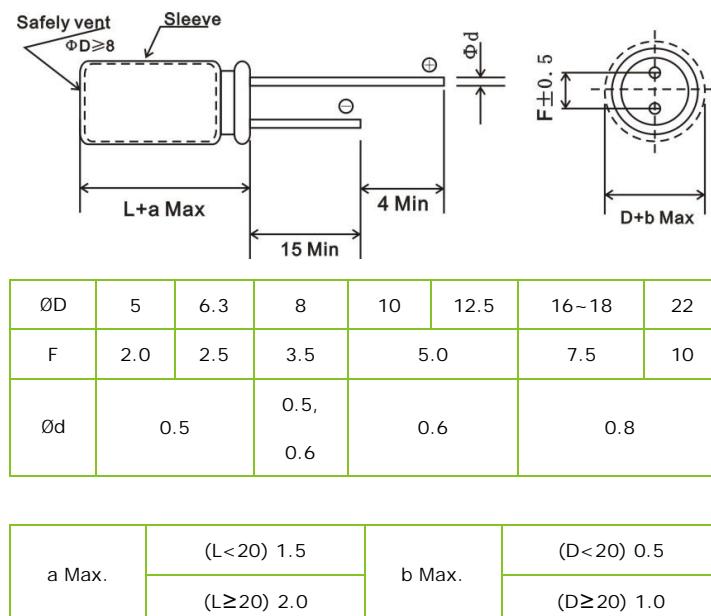

MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Rated Voltage (V)	Freq(Hz) CV(µF.WV)	50	120	1K	10K	100K
		0.1~4.7	--	0.4	0.7	0.8
6.3~100	10~47	--	0.5	0.8	0.9	1.0
	100~220	--	0.7	0.9	0.9	1.0
	330~1000	--	0.8	0.9	1.0	1.0
	2200~15000	--	0.9	1.0	1.0	1.0
	160~400	0.47~220	0.8	1.0	1.3	1.4

Temperature coefficient

Temperature(°C) Rated Voltage (V)	+70	+85	+105
6.3~100	2.0	1.7	1.0
160~400	1.8	1.4	1.0

Please visit our website to get more update data, those data & specification are subject to change without notice.



Just your best choice

Leaded Radial Aluminum Electrolytic Capacitor – JRB

STANDARD RATINGS

WV μF	6.3		10		16		25		35		50		63		100	
	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current
	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms
0.1~0.47	--	--	--	--	--	--	--	--	--	--	5x11	3	5x11	3	5x11	3
1	--	--	--	--	--	--	--	--	--	--	5x11	9	5x11	9	5x11	9
2.2	--	--	--	--	--	--	5x11	11	--	--	5x11	11	5x11	11	5x11	15
3.3	--	--	--	--	--	--	5x11	15	--	--	5x11	15	5x11	15	5x11	18
4.7	--	--	--	--	--	--	5x11	18	--	--	5x11	18	5x11	20	5x11	20
6.8	--	--	--	--	--	--	--	--	--	--	5x11	20	5x11	25	5x11	25
10	--	--	5x11	20	5x11	20	5x11	25	5x11	25	5x11	25	5x11	30	6.3x11	35
22	--	--	5x11	20	5x11	30	5x11	35	5x11	35	5x11	40	6.3x11	50	6.3x11	65
33	--	--	5x11	20	5x11	40	5x11	40	5x11	50	6.3x11	50	6.3x11	60	8x11.5	85
47	--	--	5x11	45	5x11	50	5x11	50	6.3x11	65	6.3x11	70	6.3x11	90	10x12	120
68	--	--	5x11	60	--	--	--	--	--	--	--	--	--	--	10x16	180
100	--	--	5x11	180	5x11	70	6.3x11	90	6.3x11	102	8x11.5	120	10x12	150	10x20	220
120	--	--	--	--	--	--	6.3x11	100	8x11.5	120	8x16	140	10x16	180	10x20	250
150	--	--	--	--	--	--	6.3x11	110	8x11.5	140	10x12	160	10x16	210	13x20	280
180	--	--	--	--	--	--	8x11.5	135	8x11.5	165	10x12	190	10x16	230	13x20	310
220	5x11	75	5x11 6.3x11	110 130	6.3x11	95	8x11.5	150	8x11.5	180	10x16	240	10x16	270	13x25	380
330	6.3x11	100	6.3x11	110	8x11.5	180	8x11.5	170	8x16	200	10x16	320	13x20	380	16x25	510
470	6.3x11	130	6.3x11 8x12	120 190	8x11.5	210	8x16 10x12	190 250	10x16	310	--	--	13x25	500	16x25	680
560	--	--	8x11.5 10x12	200 220	--	--	--	--	10x20	400	13x20	600	13x25	600	16x35	750
680	--	--	8x16	320	--	--	10x16	380	10x20	450	13x25	720	16x25	700	16x35	850
820	--	--	10x12	350	--	--	--	--	13x20	500	13x25	750	16x25	800	18x35	1000
1000	8x14	300	8x14	400	10x16	440	10x20	500	13x20	580	13x25	790	16x30	900	18x40	1200
1200	--	--	--	--	--	--	--	--	13x20	700	16x25	850	16x35	1100	--	--
1500	--	--	10x16	520	--	--	13x20	600	13x25	860	16x30	980	18x35	1210	--	--
1800	--	--	--	--	--	--	--	--	16x25	900	16x35	1150	--	--	--	--
2200	10x20	540	10x20	600	10x20 13x20	600 700	13x25	800	16x25	937	16x35	1230	18x35	1310	--	--
2700	--	--	--	--	--	--	16x25	900	--	--	18x35	1320	--	--	--	--
3300	13x20	670	13x20	800	13x25	920	16x25	1000	16x30	1080	18x40	1400	--	--	--	--
3900	--	--	13x20	900	--	--	--	--	--	--	--	--	--	--	--	--
4700	13x20	900	13x25	1000	16x25	1050	16x35	1400	18x40	1540	--	--	--	--	--	--
6800	13x25	1020	16x25	1200	16x35	1430	18x35	1630	--	--	--	--	--	--	--	--
8200	--	--	16x30	1450	--	--	18x35	2000	--	--	--	--	--	--	--	--
10000	16x25	1220	16x35	1600	18x35	1700	--	--	--	--	--	--	--	--	--	--
12000	--	--	16x35	1650	--	--	--	--	--	--	--	--	--	--	--	--
15000	16x35	1300	18x35	1700	--	--	--	--	--	--	--	--	--	--	--	--
22000	18x40	1400	--	--	--	--	--	--	--	--	--	--	--	--	--	--

WV μF	160		200		250		350		400		450		500	
	Size (mm)	Ripple Current												
	ØDxL	mArms												
1	6.3x11	14	--	--	6.3x11	9	6.3x11	15	8x11.5	19	8x11.5	20	--	--
2.2	6.3x11	15	6.3x11	15	6.3x11	15	6.3x11	20	8x11.5	30	8x11.5	24	--	--
3.3	6.3x11	20	8x11.5	20	8x11.5	35	8x11.5	30	8x11.5	35	8x11.5	38	--	--
4.7	6.3x11	45	8x11.5	40	8x11.5	40	8x11.5	35	8x11.5	42	10x12	42	--	--
6.8	--	--	--	--	8x11.5	50	10x12	45	10x12	58	10x20	58	--	--
10	8x11.5	65	10x12	70	10x16	70	10x20	75	10x16	78	10x20	80	--	--
22	10x12	110	10x16	110	10x16	120	13x20	130	13x20	140	13x20	150	--	--
33	10x16	150	10x16	135	13x20	170	13x25	190	13x20	210	13x25	230	--	--
47	10x20	190	13x20	190	13x25	225	16x25	300	16x20	390	16x25	400	18x25	420
56	--	--	--	--	13x25	270	16x25	340	--	--	16x30	320	--	--
68	13x20	260	13x25	250	13x25	295	16x30	370	16x25	420	18x25	366	--	--
82	--	--	--	--	16x25	310	16x35	410	18x31	450	18x31	440	--	--
100	13x25	350	13x25	310	16x25	340	18x31	450	18x31	490	18x40	490	--	--
120	--	--	--	--	--	--	--	--	18x31	530	18x40	540	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.